


Sharp Signage Display

Sharp/ NEC MultiSync M981 AirServer

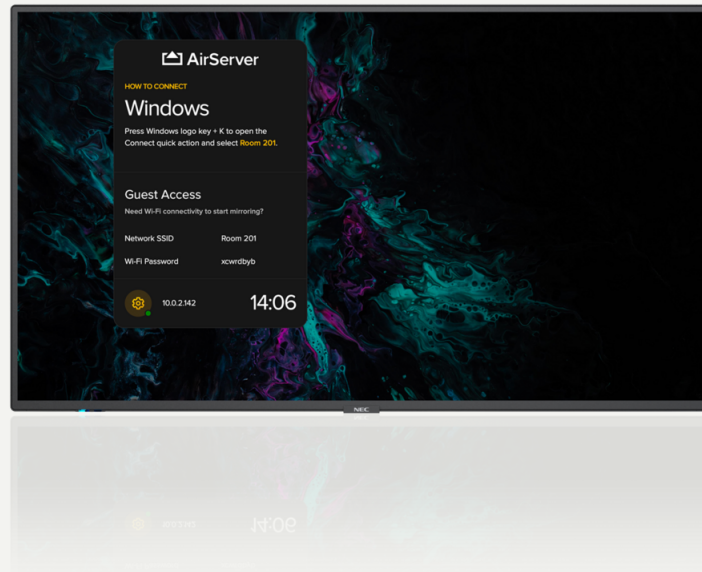

Perfect for meeting rooms and huddle spaces, the MultiSync AirServer models provide a sleek combination of intuitive screen sharing with professional display technology, supporting effortless collaboration.

- Unhindered readability – no reflections from windows or other light sources means no disruption to the visibility of signage content or meeting room presentation.
- Enhanced imaging performance – advanced settings of visual parameters allow full control of brightness, colour, gamma and uniformity via the SpectraView Engine for precise, natural images.
- Secure remote management – control your devices remotely and securely using NEC NaviSet Administrator 2; proactively manage maintenance requirements saving time and resources.
- Mission-critical 24/7 ready operation – the selection of industrial-grade components and careful design focused on demanding usage scenarios accompany an impressive and continuous viewer experience.
- Future Ready Connectivity – featuring multiple industry standard digital and analogue signal inputs for flexible integration into AV infrastructures.

Specificaties

Accessoires

[AVSpecificationAccessories]	Zender Afstandsbediening, Installatie Set-Up Handleiding, Netsnoer, HDMI-kabel, Bevestigingsbeugel, Tafelstandaard, Trolley Standaard, Batterij
Shipping Content	2x AAA-batterijen, Weergave, HDMI-kabel, Stroomkabel, Afstandsbediening, Installatiehandleiding
Special Characteristics	Frame Comp, Actieve USB-poort (10 W), Verwijderbaar logo, Actieve USB-poort (15 W)
24/7 Werking Gecertificeerd	True
Beperkte fabrieksgarantie (jaren.)	3
Lokaal Dimmen	True
Ingebouwde luidsprekers (W)	10 + 10
Energiebeheer	True
Kleur Behuizing	Zwart
Temperatuur Sensor	True
Lichtsensoren	True
Picture in Picture-modus	True
Picture by Picture-modus	True
Planner / Timer	True
Beheer Afstandsbediening	True
Versterkingsregeling	True
E-mail Notificatie	True
SNMP	True
Bedrijfsspanning (ACV) / Frequentie (Hz)	100-240
Bedrijfsspanning (ACV) / Frequentie (Hz)	50-60
Stroomverbruik (W) (MAX)	340
Werkende Temperatuur (oC)	0 - 40
Storage Temperature [°C]	-20 - 60
Storage Humidity [%]	10
Storage Humidity [%]	80
Liggend	True
Staand	True
Bevestiging (VESA/Aantal Punten/Pitch mm)	600 x 400 (FDMI)
Bevestiging (VESA/Aantal Punten/Pitch mm)	4
Bevestigingsbout Specificatie (grootte/Max Lengte)	M8
DisplayPort	1
HDMI	1
[AVSpecificationConnectivityOutputAudio35MmJack]	1
Grootte Omlijsting (L/R) mm	14
Grootte Omlijsting (U) mm	14
Grootte Omlijsting (L) mm	15
Operating Humidity (min) [%]	20
Operating Humidity (max) [%]	80
Haze Level [%]	Pro 28

AirServer Embedded Screen Mirroring Solution

Miracast	Android and Windows, extend Windows 10 desktop, Miracast over infrastructure, screen mirroring, touchback and pen support
Airplay	Code and password, extend macOS display, iOS, iPadOS and macOS, screen mirroring and content sharing
Google Cast	Android, Chrome OS and Google Chrome, prompt security, screen mirroring and cast from apps with DRM
Guest Connectivity	2.4 and 5 GHz channel selection, access control (device only, Internet only or Internet/LAN), Wi-Fi Hotspot, WPA2 security
Video Output	Up to Full HD (1920 x 1080) at 60 fps
No. of Connections	1
Networking	1 x Gigabit LAN, 802.11 ac/b/g/n Wi-Fi, 802.1X security, IPv6 addresses, Proxy
Automatic Updates	Provides new features and security enhancements
Panel Technologie	IPS with Direct LED backlights
Eigen resolutie (aantal pixels)	3840 x 2160
Aspect Ratio	16:9
Backlight Technologie	Direct LED
Helderheid (cd/m2)	500
Contrast Ratio	8000:1
Reactietijd (grijs naar grijs gem) ms	8
Viewing Angle [°]	178
Colour Depth [bn]	1073 (10bit)
Afmetingen Verpakkingsdoos (B/H/D) mm	2350
Afmetingen Verpakkingsdoos (B/H/D) mm	1400
Afmetingen Verpakkingsdoos (B/H/D) mm	310
Gewicht zonder standaard (kg)	67
Transportgewicht (Kg)	99
DisplayPort	2
HDMI	2
Audio-aansluiting van 3,5 mm	1
RS232C IN	1
LAN-poort	1
USB	3
Beelddiagonaal (inches / cm)	98
Beelddiagonaal (inches / cm)	249
Energie Sterren	True



Design and specifications are subject to change without prior notice. All information was correct at time of print. Microsoft, Excel, PowerPoint, OneDrive, SharePoint, Active Directory, Windows Server, and Windows are either registered trademarks or trademarks of Microsoft Corporation in the US and/or other countries. Adobe and PostScript 3 are either registered trademarks or trademarks of Adobe Systems Incorporated in the US and/or other countries. Google Drive, Gmail, Android, and Google Cloud Print are trademarks of Google LLC. The Google Drive trademark is used with permission from Google LLC. Box is a trademark, service mark, or registered trademark of Box, Inc. QR Code is a registered trademark of DENSO WAVE INCORPORATED in Japan and other countries. AirPrint and Mac are trademarks of Apple Inc., registered in the US and other countries. PCL is a registered trademark of Hewlett_x0002_Packard Company. Qualcomm DirectOffice is a product of Qualcomm Technologies, Inc. and/or its subsidiaries. Qualcomm is a trademark of Qualcomm Incorporated, registered in the US and other countries. DirectOffice is a trademark of CSR Imaging US, LP, registered in the US and other countries. All other company names, product names and logotypes are trademarks or registered trademarks of their respective owners. ©Sharp Corporation All trademarks acknowledged. E&O. Ref: Sharp/ NEC MultiSync M981 AirServer, 14/7/2026