


Interactive Display

# PN-LA752

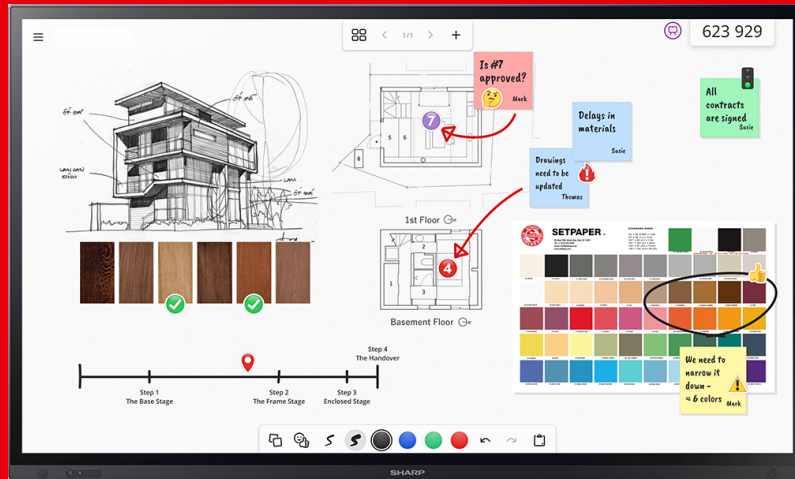

- Most natural writing experience – InGlass™ M5 premium touch system supports patented pressure sensitivity using passive pens as well as Windows Ink and palm rejection.
- Optional Windows based Intel SDM slot-in PC – driving unlimited versatility with powerful integrated computing for quick and easy access to your apps offering a secure and locked environment.
- Energy efficiency – built-in functionality including an ambient light sensor, human presence detection and eco modes help to reduce power consumption.
- Secure by design – the non-Android platform with additional security features meets the highest IT security standards.
- Increase your productivity – benefit from a free one-year license for FlatFrog Board for Rooms. FlatFrog Board whiteboard software makes hybrid work easy and productive for everyone

# Specificaties

## DISPLAYMODULE GEGEVENS

Panel Technologie	IPS with Direct LED backlights
Eigen resolutie (aantal pixels)	3840 x 2160
Beelddiagonaal (inches / cm)	75 / 189.3
Aspect Ratio	16:9
Backlight Technologie	LED
Helderheid (cd/m2)	450
Contrast Ratio	1200:1
Reactietijd (grijs naar grijs gem) ms	8
Kijkhoek (H/V)0 CR >10	178 / 178
Colour Depth [bn]	1.073 (10bit)

## AANRAAKINTERFACE SPECIFICATIE

Technologie	InGlass™ M5
Aantal Aanraakgevoelige Punten	20
Coating / Filter	Anti-glare coating
Hardheid Scherm (H)	≥ 8
Compatibiliteit met Besturingssystemen	Native Multi-Touch: Windows 7, Windows 8, Windows 10, Linux, Android; Default Mouse: Windows XP, Windows Vista, Mac OS X
Thickness [mm]	3
Haze Level [%]	4 ~ 8
Touch Method	Finger; Gloves; Stylus (≥ 2 mm)
Data Interface	USB-HID
Accuracy [mm]	< 1
Palm Rejection	Yes
Windows Ink	Yes

## MATEN EN GEWICHTEN

Grootte Omlijsting (L/R) mm	4.8
Grootte Omlijsting (U/L) mm	4.8 / 32.3
Product Afmetingen (B/H/D) mm	1,720.1 x 1,025.9 x 86.5
Gewicht zonder standaard (kg)	56.5

## CONNECTIVITEIT (AUDIO/VIDEO) INPUT

HDMI	2
DisplayPort	1

## CONNECTIVITEIT (BEHEER /SERIËLE) GEGEVENS

RS232C IN	1
LAN-poort	1
USB	4

## BELANGRIJKSTE SPECIFICATIES

Special Characteristics	DICOM Simulation; HDMI ARC; Powered USB Port (5 W)
24/7 Werking Gecertificeerd	•
Lokaal Dimmen	•
Ingebouwde luidsprekers (W)	10 W + 10 W
Energiebeheer	•

## VOEDING EN BESTURINGSOMGEVING

Bedrijfsspanning (ACV) / Frequentie (Hz)	100-240; 50 / 60
Stroomverbruik (W) (MAX)	205 shipping
Werkende Temperatuur (oC)	+5 to +35
Vochtigheid (%)	20 to 80
Power Savings Mode [W]	< 0.5 (ECO Standby); < 2 (Networked Standby)

## INSTALLATIE

Liggend	•
Staand	•
Horizontaal	•
Bevestiging (VESA/Aantal Punten/Pitch mm)	4; 600 x 400

## CONNECTIVITEIT (AUDIO/VIDEO) OUTPUT

DisplayPort	1
Audio/Koptelefoon Aansluiting 3,5 mm	1

## ACCESSOIRES

Shipping Contents	1x 300 cm USB Cable; 2 x Passive Stylus; 2x AAA batteries; Blank Sticker; Bracket for Camera; Bracket for Mini PC; Cable Clamps; Display; Power Cable; Remote Control; Setup Manual
-------------------	---

