

Light Production Photocopiers


Sharp BP-80C70



For extensive support with your in-house printing, the BP-80C70 offers versatile solutions and configurations to suit your needs to maximise high quality productivity with ease.


- Fast output speed of 70ppm in colour and 76ppm for Black and White even on 220 g/m² paper weight.
- A variety of finishing options, including inserter, folding unit and trimming module let you print professional documents in-house.
- Intuitive icons on the 10.1-inch full-flat touchscreen control panel make operation smooth and easy.
- 300-sheet DSPF scans two-sided documents at 300 ipm.
- Single sign-on lets you securely print from or scan to public cloud storage services quickly and easily.
- With support for Microsoft Entra ID you can manage identities and control device access via a secure cloud-based tool.
- Embedded Fiery® Server (option) helps manage workflows in a busy on-demand printing environment.
- Versatile paper handling with support for a wide range of paper types and sizes, up to SRA3/A3W as well as extra-long and custom sizes.
- The optional inserter can support up to 360 g/m² paper weight and has a double-feed detection option and an air-feed system to prevent multiple sheets from feeding at once.
- Smart scanning with Auto Set lets the MFP will automatically determine the optimal resolution, gradation, orientation and compression rate for your scan jobs.
- Multi-layered security features to keep the device and your data secure include automatic BIOS recovery if anomalies are detected during start-up.
- Main Unit made with 50% recycled plastic.

Configurations

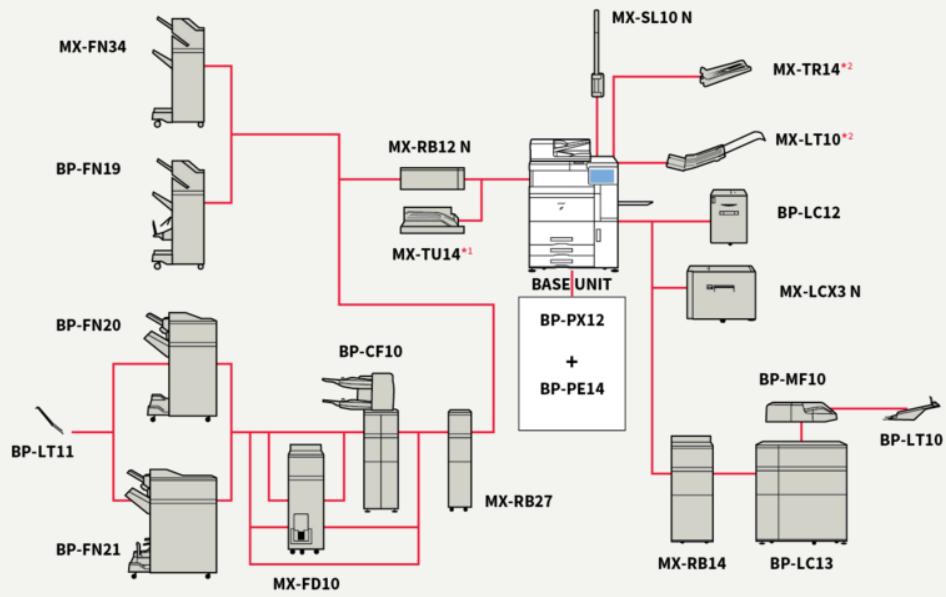

- *1: Minimum required equipment.
- **2: Cannot be used with MX-RB14, BP-LC13, BP-MF10, and BP-LT10.

Dimensions

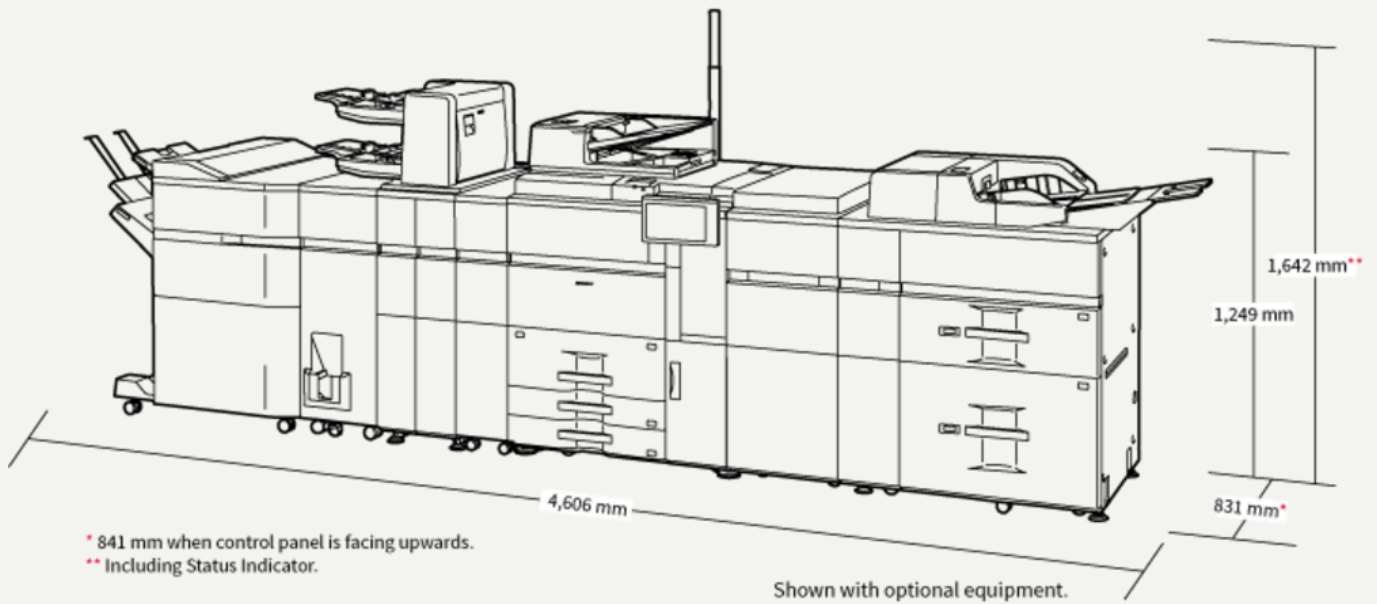

- * 841 mm when control panel is facing upwards.
- ** Including Status Indicator.

Options

Base Unit

MX-SL10N Status Indicator

MX-LCX3N Large Capacity Tray (A3)

A3 - A4R (also supports 13" x 19.2"), 3,000 sheets (80gsm); Requires MX-MFX1. Cannot be installed with MX-LC12 or MX-LC13 N.

BP-LC12 Large capacity tray

Large Capacity Tray (Roller Feeding, A4 / 8.5"x11"). Feedable paper weight: 60~220g/m2. Paper Capacity: 3,500 sheets (80g/m2).

BP-LC13 Large capacity trays

Large capacity tray (2-tier). Paper capacity: Upper tray: 2,500 sheets
Lower tray: 2,500 sheets (80g/m2). Requires MX-RB14.

BP-PE14 Fiery server

Local option. Embedded Fiery Printer Controller. Requires MX-PX12 Interface Kit.

BP-PX12 Interface kit

Interface kit for Embedded Fiery Printer Controller.

Faxing

MX-FWX1 Internet Fax Expansion Kit

BP-FX11 Fax Expansion Kit

Storage

BP-SD10 High Capacity SSD

512GB SSD

Printing

MX-PF10 Barcode Font Kit

Enables barcode printing

Security

BP-VD10 Virus Detection Kit

MX-FR12U Data Security Kit

Sharp OSA

MX-AMX1 Application Integration Module

Finishing

MX-TU14 Exit Tray Cabinet

Required if MX-RB12 N is not installed.

MX-FD10 Folding Unit

Folding options include Z, C, accordion, double and half folds.; Can only be installed with MX-FN20, MX-FN21 or MX-FN22.

MX-RB27 Curl Correction Kit

Corrects paper curling by putting pressure on the convex/concave curl.

MX-RB14 Paper Pass Unit (between Base Unit and MX-LC13 N)

Required if MX-LC13 N is installed.

MX-RB13 Relay Unit (between 100-sheet Finisher and inserter)

Required between 100 sheet staple finisher (MX-FN21 or MX-FN22) and MX-CF11.

MX-TR14 Exit Tray Unit

Cannot be installed with MX-RB14, MX-LC13 N and MX-MF11.

MX-LT10 Long Paper Feeding Tray

Recommended for banner printing

MX-TM10 Trimming Module

Requires MX-FN22 or MX-FN21.

MX-RB12 N Paper Pass Unit

Required if MX-TU14 is not installed.

MX-PN16D Punch Module - 4 Hole Wide

Punch module for BP-FN15/BP-FN16/BP-FN19/MX-FN30/MX-FN31/MX-FN34/MX-FN35

MX-PN16C Punch Module - 2/4 Hole

Punch module for BP-FN15/BP-FN16/BP-FN19/MX-FN30/MX-FN31/MX-FN34/MX-FN35

MX-PN16B Punch Module - 3 Hole

Punch module for BP-FN15/BP-FN16/BP-FN19/BP-FN34

MX-FN34 Finisher

(3k - 65-sheet staple),
A3 - B5 (offset/staple), A3W - A5 (non offset),
Requires MX-RB26. Cannot be installed with MX-FN35.

BP-CF10 Inserter

Roller Feeding (Air-assisted feeding system). Paper Capacity: Two trays with 200 sheets each (80g/m2). Paper Weight: 52~360 g/m2.

BP-DD11 Double feed detection kit

Double feed detection Kit (for Inserter BP-CF10). Eliminates double feeding of paper while scanning

BP-FN19 Saddle stitch finisher (65-sheet staple)

3,000 sheet finisher. Staple upto 65 sheet. Requires RB12N.
Non offset SRA3/A3W to A6.
Offset/staple A3 to B5.
Stapleless staple A3, A4.

BP-FN20 Finisher (100-sheet staple)

4,000 sheet finisher. Staple upto 100 sheet. Requires RB12N.
Non offset SRA3/A3W to A6.
Offset/staple A3 to B5.
Stapleless staple A3, A4.

BP-FN21 Saddle stitch finisher (100-sheet staple)

4,000 sheet finisher. Staple upto 100 sheets. Requires RB12N.
Non offset SRA3/A3W to A6.
Offset/staple A3 to B5.

BP-LT10 Long paper feeding tray

Long Paper feeding Tray (for LCT Bypass Tray). Recommended for banner printing. Paper Capacity: Up to 700mm: 500 sheets
Over 700m: 1 sheet. For BP-MF10. Requires BP-LT11.

BP-LT11 Long paper exit tray

For BP-FN20 or BP-FN21. Long paper exit tray for 4k finisher / 4k saddle finisher. Paper Capacity up to 762mm: 100 sheets

BP-MF10 Multi bypass tray

For BP-LC13. Feedable paper weight:55~220g/m2, 13lbs Bond-80lbs Cover.
Paper capacity: 500 sheets (80 g/m2), 550 sheets (64 g/m2).
Stacking capacity: up to 55 mm.

BP-PN10C Punch module

Punch Unit (4 holes/2 holes) for 4K Finisher/Saddle Stitch Finisher. Manual switching :2/4 holes.

BP-PN10D Punch module

Punch Unit (4 wide holes)for 4K Finisher/Saddle Stitch Finisher. Manual switching :2/4 holes.

Specifications

General

Engine speed: A4 Colour (ppm)	70
Engine speed: A4 B/W (ppm)	76
Engine speed: SRA3 Colour (ppm)	33
Engine speed: SRA3 B/W (ppm)	33
Engine speed: A3 Colour (ppm)	34
Engine speed: A3 B/W (ppm)	34
Paper size: Min.	A6R
Paper size: Max.	SRA3
Paper weight: Min. (g/m ²)	60
Paper weight: Max. (g/m ²)	300
Paper weight multi-bypass: Min. (g/m ²)	55
Paper weight: multi-bypass: Max. (g/m ²)	300
Paper capacity: Std. (sheets)	3100
Paper capacity: Max. (sheets)	8500
Warm-up time (sec.)	55
Memory general: Max. (GB)	6
Storage: Std.	SSD
Storage: Opt.	SSD
SSD capacity: Std. (GB)	256
SSD capacity: Opt. (GB)	512
Average monthly print volume (pages)	8900
Maximum print volume (pages)	300000
Duplex	Std.
Power requirements: Frequency Min. (Hz)	220
Power requirements: Frequency Max. (Hz)	240
Power consumption (kW)	3.84
Control panel size (")	10.1
Width (mm)	845
Depth (mm)	841
Height (mm)	1249
Weight (kg)	207

Copy

Original paper size: Min.	A6R
Original paper size: Max.	A3
First copy out time: Colour (sec.)	4.8
First copy out time: B/W (sec.)	3.7
Continuous copy (Max. copies)	9999
Scan resolution: B/W (dpi)	600 x 600, 600 x 400
Scan resolution: Colour (dpi)	600 x 600
Print resolution (dpi)	1200 x 1200, 600 x 600, 9600 (equivalent) x 600
Gradation: Colour (equivalent levels)	256
Gradation: B/W (equivalent levels)	256
Zoom range: Min. (%)	25
Zoom range: Max. (%)	400
Preset copy ratios	10
Scan method	Pull scan, Push scan

Finish

Output capacity: Max. (sheets)	250
Saddle stitch	Opt.
Hole punch	Opt.
GBC punch	Opt.
Interserter	Opt.
Folding	Opt.

Scan

Push scan	Std.
Pull scan	Std.
Push scan resolution (dpi)	100, 300, 600, 200, 150, 400
Pull scan resolution (dpi)	75, 600, 50-9600, 150, 200, 300, 100, 400
Document feeder	DSPF
Document feeder capacity (sheets)	300
Scan speed: B/W simplex (opm)	150
Scan speed: B/W duplex (opm)	300
Scan speed: Colour simplex (opm)	150
Scan speed: Colour duplex (opm)	300
File formats: Std.	Rich Text (RFT), TIFF, PDF, JPEG, Searchable PDF, PDF/A-1a, PDF/A-1b, Encrypted PDF, Compact PDF, XPS, Text (TXT), Office Open XML (pptx, xlsx, docx)

Scan destinations

Desktop, FTP, Email, Network folder, USB, Fax

Print

Resolution (dpi)	1200 x 1200, 600 x 600, 9600 (equivalent) x 600
Interface: Std.	USB 2.0, USB 3.0, 10Base-T, 100Base-TX, 1000Base-T
Supported OS: Std.	Windows 11, Windows Server 2016, Windows Server 2019, Windows Server 2022, Mac OS X 10.15, Mac OS X 11, Mac OS X 12, Mac OS X 13, Windows Server 2025, macOS 15, Mac OS X 14
Network protocols	TCP/IP
Printing protocols	LPR, Raw TCP (port 9100), POP3 (e-mail printing), HTTP, FTP, IPP, IPP Everywhere, SMB, WSD
PDL: Std.	PCL6, Adobe® PostScript® 3™
Available Fonts	80 PCL, 139 PostScript 3

Fax

Fax	Opt.
Compression method	MH, MR, MMR, JBIG
Communication protocol	G3, Super G3
Transmission time (sec.)	2
Document size: Min.	A5R
Document size: Max.	A3
Memory: Max. (GB)	4
Dial registration: rapid/speed dial	2000

File

Document filing	Std.
Capacity: main & custom folders (pages)	20000
Capacity: quick file folder (pages)	10000
Stored jobs	Print, Copy, Scan, Fax transmission
Storage folders	Quick file, Main, Custom

Wireless Lan

Wireless LAN	Std.
Compliant regulation	IEEE802.11a/ac/b/g/n
Security	WPA/WPA2-mixed EAP, WPA2 PSK, WPA3 SAE, WEP, WPA/WPA2-mixed PSK, WPA3 EAP, WPA2 EAP

